





Model: 90K

Gross: 89,500 lbs.
Forks & Carriage: 5,400 lbs.
Boom: 9,000 lbs.
Stand: 1,000 lbs.
7xCounterweights: 5,000 lbs.each
Hydraulic Pressure: 2,750 PSI

	Rated Forklift Capacities lbs.						
Load Center in Inches	24	36	48	60	72	84	96
0 CWT	35,480	29,880	25,810	22,710	20,280	18,310	16,700
1 CWT	43,550	36,670	31,670	27,870	24,880	22,480	20,490
2 CWT	51,610	43,460	37,540	33,030	29,490	26,640	24,290
3 CWT	59,680	50,250	43,400	38,190	34,100	30,800	28,080
4 CWT	67,740	57,050	49,270	43,350	38,710	34,960	31,880
5 CWT	75,810	63,840	55,130	48,520	43,320	39,130	35,670
6 CWT	83,870	70,630	61,000	53,680	47,930	41,250	36,250
7 CWT	91,940	77,420	66,860	58,000	48,250	41,250	36,250

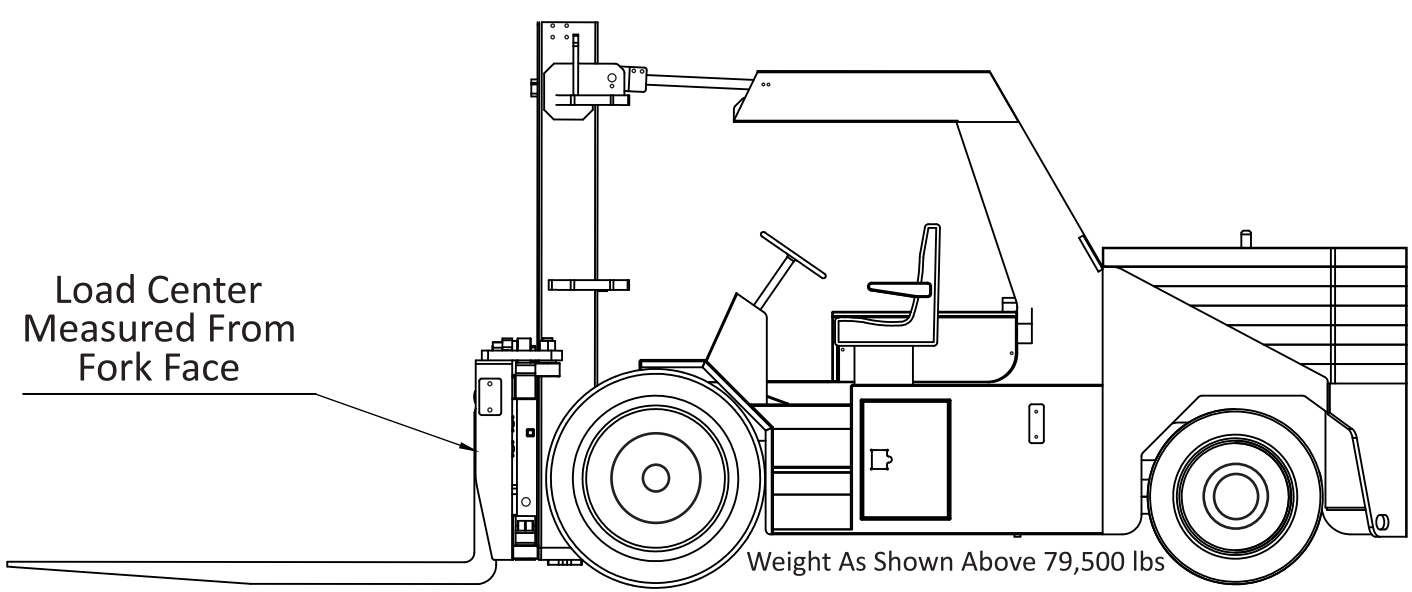

	Stage One						Stage Two				
	Rated Boom Capacities lbs.										
Load Center in Inches	12	24	36	48	60	72	84	96	108	120	132
0 CWT	32,520	27,160	23,310	20,420	18,170	16,360	14,880	13,650	12,610	11,710	10,390
1 CWT	40,890	34,150	29,310	25,680	22,840	20,570	18,710	17,160	15,850	14,720	13,740
2 CWT	49,260	41,130	35,310	30,930	27,520	24,780	22,540	20,670	19,090	17,730	16,560
3 CWT	57,630	48,120	41,310	36,180	32,190	28,990	26,370	24,190	22,330	20,750	19,370
4 CWT	65,990	55,110	47,310	41,440	36,870	33,200	30,200	27,700	25,580	23,760	22,180
5 CWT	74,360	62,100	53,300	46,690	41,540	37,410	34,030	31,210	28,820	26,770	24,990
6 CWT	82,730	69,080	59,300	51,950	46,210	41,620	37,860	34,720	32,060	29,780	26,000
7 CWT	90,000	76,070	65,300	53,400	47,600	42,800	39,000	35,800	33,000	30,700	26,000

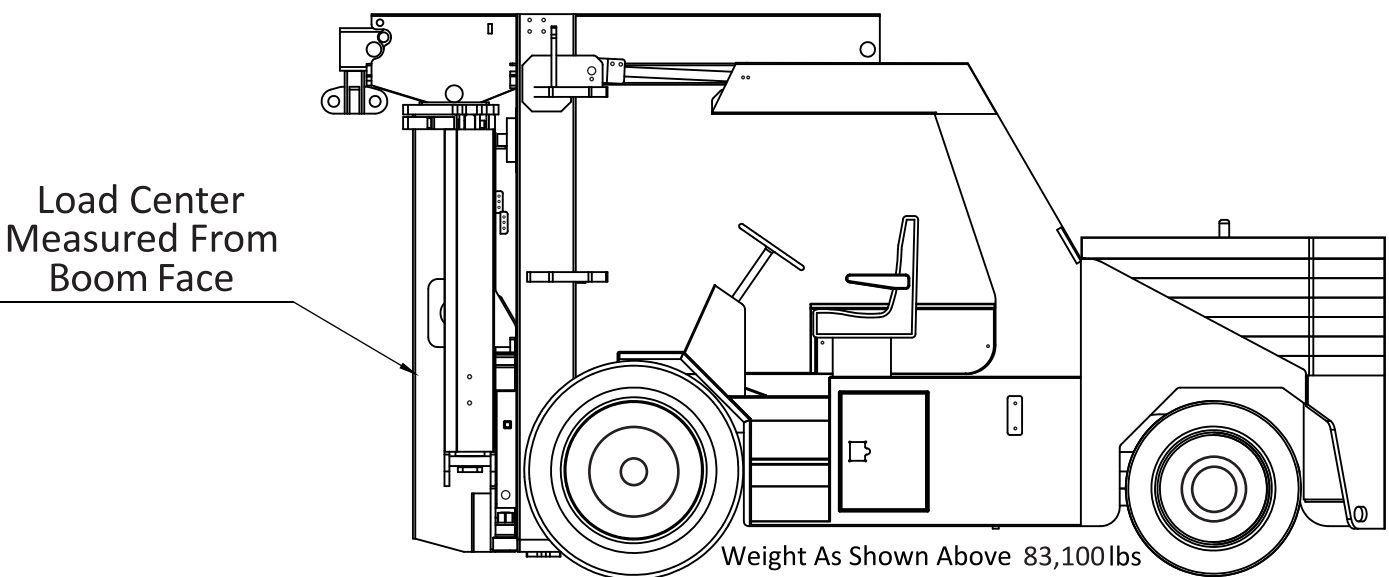

*CAPACITIES RATED WITH MAST VERTICAL